


Installation Guidelines

Prior to installation, tags must be handled properly. Tags cannot be bent or folded when handled or in storage. Place the tag face down on a flat surface, then hold the tag flat while you peel the backing away from the tag.



- For optimal success rates, the tag should be placed with two inches of headlight above and below the sticker (i.e. not near the car's frame and with one inch of clearance from the left and right).
- Sticker **MUST** be installed horizontally.
- For best results, place the sticker in a location where the vehicle's approach will bring the sticker to face the reader.

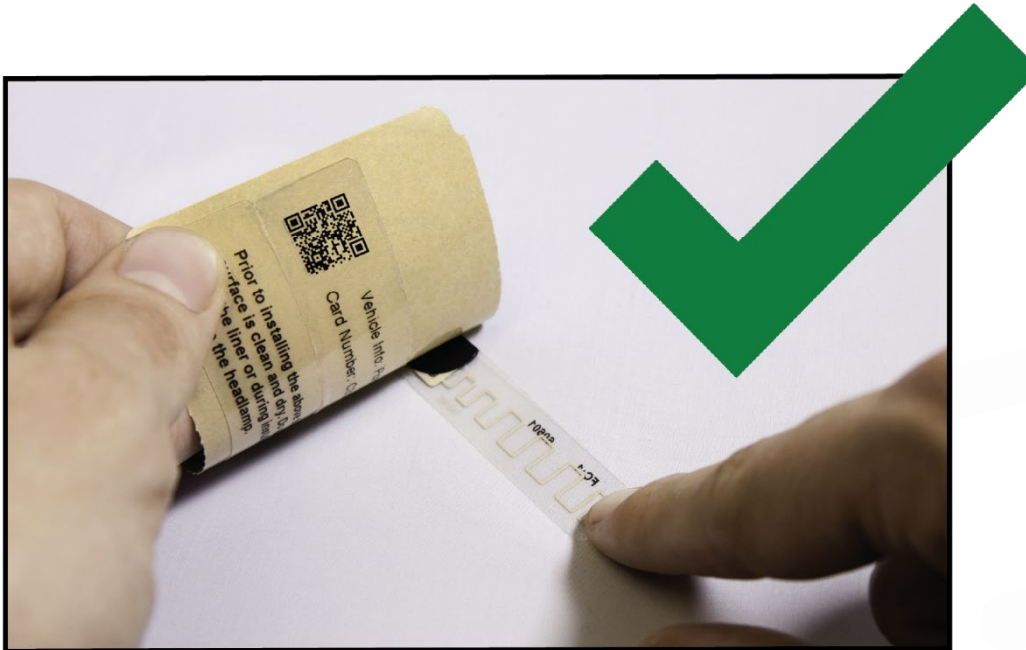

headlightsticker.com/support



9601 Irvine Center Dr.
Irvine, CA 92618
888-929-7343
headlightsticker.com


Installation (Continued)

Always place the HeadlightSticker™ horizontally on the headlight.



When placing the tag, you only have one chance! Removing the tag – even if it was only applied for a second – can render the tag ineffective.

If the tag is installed incorrectly, remove it, discard it, and install another one.

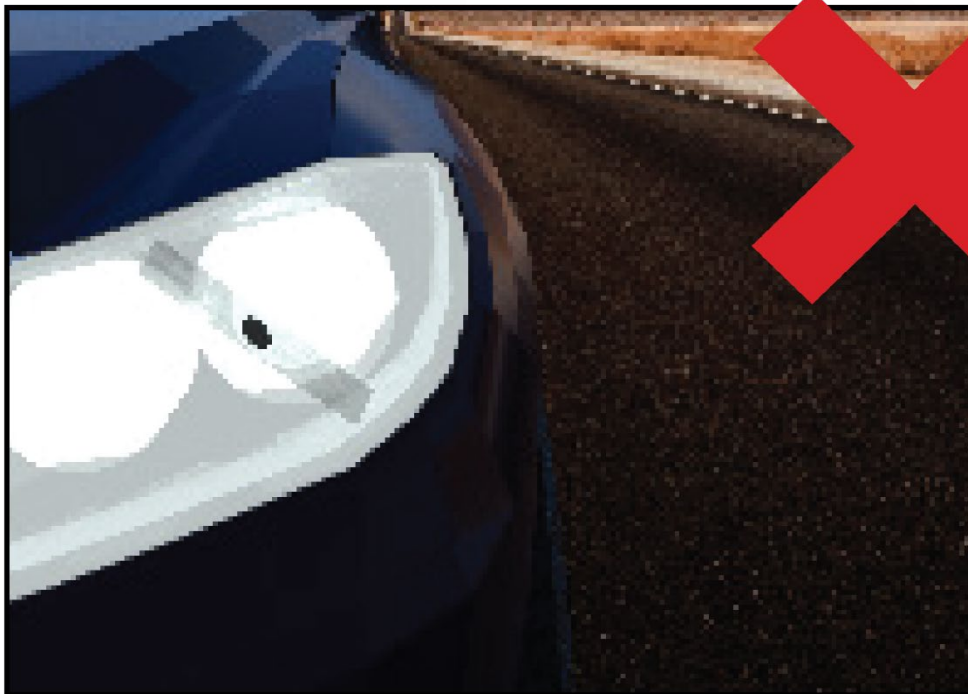

headlightsticker.com/support

Installation (Continued)

Place the tag to face the reader for best results.



Below, the tag is on the wrong side of the reader.



headlightsticker.com/support