

Procedures for Installing an RFID Sticker


The Windshield RFID Sticker transponder is our interior premium RFID transponder, purpose-built for vehicular application and identification.

*Transponder installations are simple enough. But remember that stickers are designed to break upon removal: **meaning you have to get it right the first time!***

1. Clean the inside section of your windshield before applying RFID sticker

Use window cleaner and a microfiber cloth (to prevent scratching the headlight).

Make sure the surface is dry before proceeding with the installation

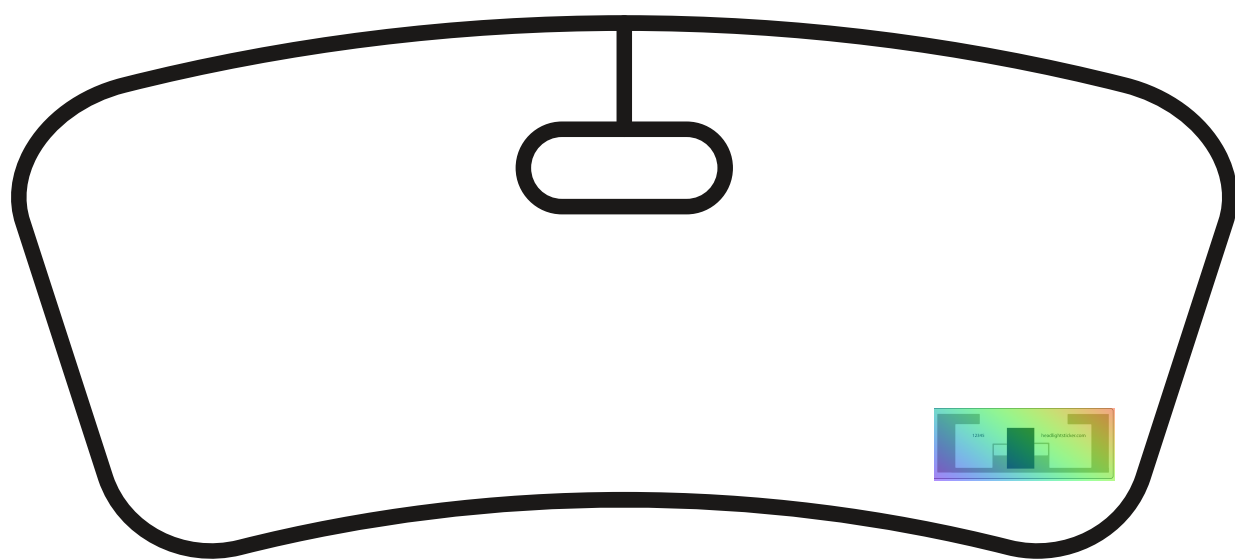

Remember!

- Place stickers horizontally
- Sticker faces RFID antenna (rule of thumb)
- Only one chance to get it right!



2. Tag Handling

- Place sticker face down on a flat surface
- Hold sticker down with fingertip/nail
- Peel the backing away from the sticker



3. Installation

Hold the Windshield RFID Sticker (horizontally) by the edges, press down, and smooth out the tag to remove air bubbles.

- Mount the tag at least 2 inches away from vehicle metal.
- Install sticker on same side as RFID reader

The Don'ts & Avoids

- Once on, don't lift up – no more adjusting
- Avoid vehicle metal
- Avoid scrubbing/scratching over sticker
- Having Issues? Don't remove the sticker – Call for help first!



Need More Help?

Get Connected with your certified
HLS Dealer